

SUZUKI

DL 650 V-Strom my 12/16

product	code	description
Monoshock (R-L-P)	MS134.1KD	M46KD std
Monoshock (R-L-HP)	MS134.1KDID	M46KD+ID hydraulic spring preload
Monoshock (C-R-L-P)	MS134.1KF	M46KF std
Monoshock (C-R-L-HP)	MS134.1KFPK	M46KF+P7K flex-knob hydraulic spring preload
Fork kit (P) (fork type Showa)	FS130KE	FKE Spring kit
Fork kit (P) (fork type Showa)	FS130SE	FSE Hydraulic kit
Fork kit (C-R-P) (fork type Showa)	F15S130K	F15K "quad valve system" Hydraulic Cartridge kit

M46KFPK

M46KDID

M46KF

M46KD

Dark series on demand

C = Compression adj. / regolaz. Compressione
R = Rrebound adj. / regolaz. estensione
L = Length adj. / regolaz. Interasse
P = std spring Preload / precarico molla standard
HP = hydraulic spring Preload adj. / Precarico molla idraulico

Compression adjustment

Flex-knob hydraulic spring preload

Standard Preload adjustment

Rebound adjustment

Length adjustment

SUZUKI DL 650 V-Strom my 12/16




*from conventional
non-adjustable
to fully-adjustable fork*

F15K "quad valve system" fork kit



FSE fork kit

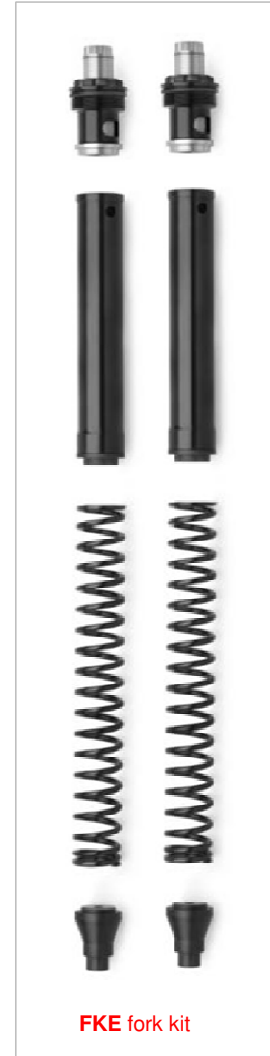

FKE fork kit

Quad-valve asymmetric system



Compression unit
(range: 25 clicks)

Preload unit
(range: 15 mm)

Rebound unit
(range: 25 clicks)

